

# Environmental Product Declaration

## DRAWN WIRE

---

**Based on:**

PCR 2019:14  
Construction products  
v 1.3.4  
EN:15804:2012+A2:2019  
ISO 14025

---

**Programme:**

The International EPD  
System  
[www.environdec.com](http://www.environdec.com)

---

**Registration N°:**

EPD-IES-0010132:002

---

**CPC code:**

41

---

**Revision date:**

17/07/2024

---

**Programme operator:**

EPD International AB

---

**Date of issue:**

24-07-2023

---

**Valid until:**

16/07/2029

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)

# General information

## EPD REFERENCES

EPD OWNER: FERALPI SIDERURGICA SPA - FERALPI GROUP, Via Nicola Pasini 11, 25017 Lonato, Brescia - Italy  
 Manufacturing plant is located in the same site

PROGRAM OPERATOR: epd international ab, box 21060, SE-100 31 Stockholm, Sweden; info@environdec.com

NEW EPD

## INDEPENDENT VERIFICATION

This declaration has been developed referring to the International EPD System, following the General Programme Instructions v 4; further information and the document itself are available at: [www.environdec.com](http://www.environdec.com). EPD document valid within the following geographical area: Italy and other countries worldwide according to sales market conditions.

ISO standard ISO 21930 and CEN standard EN 15804 served as the core PCR  
 PCR 2019:14 Construction products, Version 1.3.4  
 PCR review was conducted by: The Technical Committee of the International EPD® System. See [www.environdec.com/TC](http://www.environdec.com/TC) for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat [www.environdec.com/contact](http://www.environdec.com/contact).

Independent verification of the declaration and data, according to EN ISO 14025 : 2010

Third party verifier: ICMQ SpA, via De Castillia, 10 20124 Milano  
 ([www.icmq.it](http://www.icmq.it))

EPD process certification (Internal)
  EPD verification (External)

Accredited by: Accredia

Procedure for follow-up during EPD validity involves third party verifier:

YES
  NO

Environmental declarations published within the same product category, but from different programmes may not be comparable. In particular, EPDs of construction products may not be comparable if they do not comply with EN 15804. EPD owner has the sole ownership, liability and responsibility of the EPD.

## CONTACTS

Eric Filippini E-mail: [eric.filippini@it.feralpigroup.com](mailto:eric.filippini@it.feralpigroup.com) Phone: (+39) 030 99 961



Technical support to Feralpi Group was provided by Life Cycle Engineering, Italy.  
 ([info@lcengineering.eu](mailto:info@lcengineering.eu), [www.lcengineering.eu](http://www.lcengineering.eu)).



# Company profile


**THE FERALPI GROUP** is one of Europe's leading manufacturers of steels for use in building construction.

The parent company Feralpi Siderurgica, which was set up in 1968 in Lonato del Garda, near Brescia, has developed steadily over the years to form a group of industries that currently more than two million tonnes of steel and rolled products a year, and has a workforce of 1500 permanent employees in Italy, Europe and North Africa.

**In over fifty years of business**, the company has branched out to foreign markets and have been able to face the challenge of an increasingly globalized steel industry. Starting from its lengthy tradition in steel manufacturing, the Group has developed according to a strategy of diversification into new products and markets, which has involved not only the internal organisation but also external transactions thanks to the acquisition of numerous enterprises operating in this industry. The Feralpi Group also operates in the field of special steels, cold working, structural steelwork, the environment and fish farming, not to mention financial activities and investments.

Since its very origins, Feralpi has focused not only on producing the best steel grades for building construction but also on doing it in the most sustainable possible way, which has involved reducing energy consumption and emissions by using the latest technology available or developing in-house new solutions covered by patents as a result of intensive innovation and research.

## FERALPI, AN INTERNATIONAL DIVERSIFIED GROUP (2022)

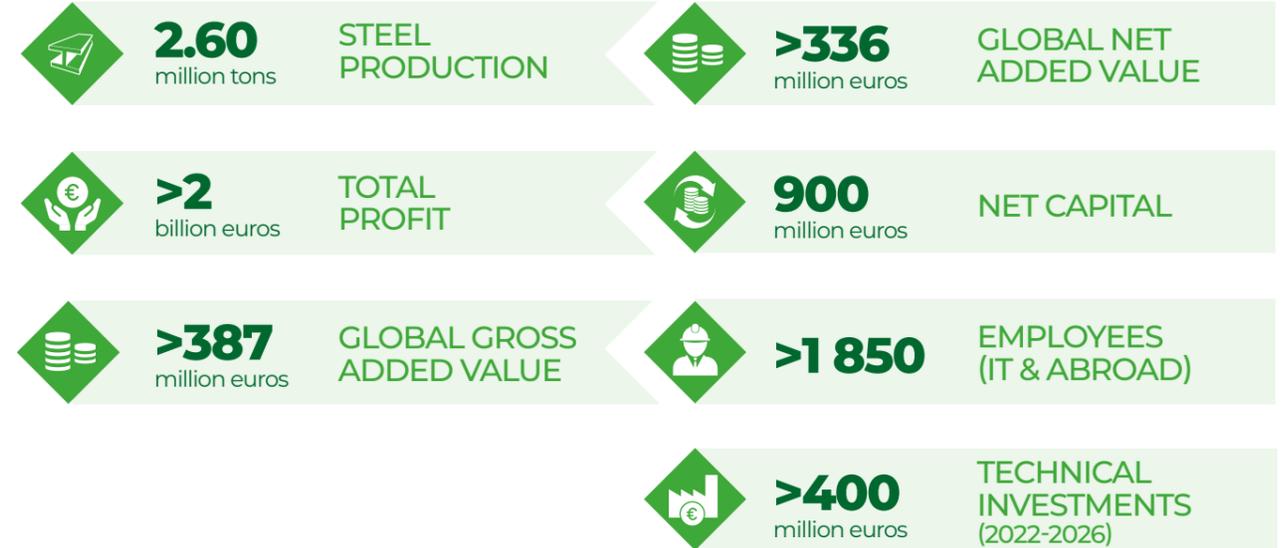

### Lonato del Garda

Feralpi Siderurgica,  
set up in  
1968



# Scope and Type of EPD

THE APPROACH USED IN THIS EPD IS "CRADLE TO GATE WITH OPTIONS" ONE

Table of modules

MODULE	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE						END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES	
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
	Raw material supply	Transport	Manufacturing	Transport to the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	Waste processing	Disposal	Reuse - Recovery - Recycling Potential
modules declared	✓	✓	✓	✓	MND	MND	MND	MND	MND	MND	MND	MND	✓	✓	✓	✓	✓
geography	IT	IT	IT	WLD	-	-	-	-	-	-	-	-	WLD	WLD	WLD	WLD	WLD
specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
variations - products	NOT RELEVANT			-	-	-	-	-	-	-	-	-	-	-	-	-	-
variations - sites	NOT RELEVANT			-	-	-	-	-	-	-	-	-	-	-	-	-	-

**SOFTWARE:** SimaPro ver. 9.5

**MAIN DATABASE:** Ecoinvent 3.9.1

**REPORT LCA:** Life Cycle Assessment (LCA) applied to steel mill products and derivatives for EPD® purposes - final report

**GEOGRAPHICAL SCOPE OF THE EPD:** World according to sales market conditions

**TYPE OF EPD:** specific for cold rolled steel products

# The product

Drawn coils are produced using either a **cold-rolling or wire rod stretching process**, which gives two steel grades B450A and B500A of a great potential:

The roll is used either as a finished product or as an intermediate product for downstream processes: welded mesh; lattice girders; brackets used in the assembly of metal reinforcements.

**The main materials of the final product are:** iron > 96%; alloy elements (e.g. manganese, silicon, carbon) 2% c.a.; other elements (e.g. copper, nickel, chromium) complementary to 100%; for (post-consumer) recycled content see section Other optional additional environmental information.

**Declared unit** for the study is **one tonne of cold rolled drawn wire.**

INFORMATION	DESCRIPTION
<b>PRODUCT IDENTIFICATION</b>	Drawn Wire
<b>PRODUCT FEATURES</b>	Cold rolled: Diameters from 5 to 10 mm Weight from 1 800 to 2 300 kg
<b>PRODUCT PROPERTIES (UNDER EN16120-2:2017)</b>	Steel coming from post and pre consumer steel scraps produced in electric arc furnace route (EAF) and further hot and cold stretched
	Adherence and surface geometry $f_p$ : - for $\varnothing \leq 6$ mm $\geq 0.037$ - for $\varnothing > 6$ mm $\geq 0.042$
	Weldability: $C_{eq} < 0.52$
	Typical yield stress: $Re$ or $Rp_{0.2} > 450$ MPa
	Elongation: $Agt > 2,5\%$
	Successful in bend and rebend test Successful in Tensile strength test
<b>PLANT FEATURES</b>	Total amount of products covered by this EPD, year 2023: 633 017 t
	Total production, for selling purpose, year 2023: 633 017 t
	On-site air emission control system
	On-site system to recycle process water
	On-site system to recycle water used in process
	In/out materials/products and melting process monitored to prevent nuclear radiation
	In house photovoltaic plant of 625 kW peak capacity operating since 2011

# Environmental performance

The detailed environmental performance (in terms of use of resources, pollutant emissions and waste generation) is presented for the three phases, **Upstream, Core and Downstream** and related sub-phases (A1-A2-A3-A4-C1-C2-C3-C4-D). The numbers reported in the following tables are the outcome of rounding. For this reason total results could slightly differ from the sum of contributions of the different phases. The energy sources behind the electricity grid used in manufacturing is a mix between Italian residual mix 2022 and renewable energy with Guarantees of Origin related network losses and transformation. Final emission factor is 0,118 kg CO<sub>2</sub> eq. /kWh.

## Environmental impacts per declared unit

	UNITÀ	UPSTREAM		CORE PROCESS		A1:A3	DOWNSTREAM				
		A1	A2	A3	A4		C1	C2	C3	C4	D
<b>GWP</b>	kg CO <sub>2</sub> eq	3,01E+02	1,62E+01	1,59E+02	4,76E+02	4,01E+01	5,26E+01	1,78E+01	2,31E+00	2,70E-01	1,44E+02
<b>GWP,f</b>	kg CO <sub>2</sub> eq	3,00E+02	1,62E+01	1,58E+02	4,74E+02	4,01E+01	5,26E+01	1,78E+01	2,30E+00	2,70E-01	1,44E+02
<b>GWP,b</b>	kg CO <sub>2</sub> eq	3,77E-01	7,41E-03	1,76E-01	5,60E-01	6,27E-03	3,13E-03	1,06E-03	5,63E-03	2,85E-05	1,12E-02
<b>GWP,luluc</b>	kg CO <sub>2</sub> eq	1,05E+00	3,27E-03	5,44E-02	1,11E+00	2,64E-03	2,16E-03	3,52E-04	5,79E-03	1,36E-05	1,38E-02
<b>GWP,ghg</b>	kg CO <sub>2</sub> eq	3,01E+02	1,62E+01	1,59E+02	4,76E+02	4,01E+01	5,26E+01	1,78E+01	2,31E+00	2,70E-01	1,44E+02
<b>ODP</b>	kg CFC-11eq	8,63E-06	3,48E-07	9,57E-07	9,93E-06	8,82E-07	8,30E-07	3,88E-07	1,47E-08	4,02E-09	2,71E-06
<b>AP</b>	mol H+ eq	1,19E+00	5,30E-02	3,16E-01	1,56E+00	7,01E-02	5,04E-01	3,59E-02	1,12E-02	2,51E-03	5,60E-01
<b>EP,f</b>	kg P eq	7,95E-02	1,20E-03	2,23E-02	1,03E-01	9,57E-04	3,97E-04	1,23E-04	1,04E-03	8,07E-06	6,70E-02
<b>EP,m</b>	kg N eq	2,81E-01	2,04E-02	1,02E-01	4,03E-01	2,16E-02	2,37E-01	1,26E-02	2,38E-03	1,14E-03	1,20E-01
<b>EP,t</b>	mol N eq	2,93E+00	2,15E-01	1,06E+00	4,20E+00	2,19E-01	2,57E+00	1,31E-01	2,38E-02	1,24E-02	1,28E+00
<b>POCP</b>	kgNMVOCeq	1,19E+00	7,97E-02	3,91E-01	1,66E+00	1,19E-01	7,57E-01	6,06E-02	7,15E-03	3,71E-03	6,85E-01
<b>ADPE*</b>	kg Sb eq	1,76E-04	5,96E-07	2,63E-05	2,03E-04	1,43E-06	2,21E-06	6,18E-07	6,57E-08	1,07E-08	1,27E-03
<b>ADPF*</b>	MJ	4,95E+03	2,30E+02	8,55E+02	6,04E+03	5,53E+02	6,92E+02	2,39E+02	3,08E+01	3,47E+00	1,23E+03
<b>WDP*</b>	m <sup>3</sup>	1,20E+02	4,77E-01	9,85E+01	2,19E+02	6,62E-01	8,87E-01	2,19E-01	4,00E-01	4,78E-03	1,21E+01

**GWP** Global warming potential, total  
**GWP,f** Global warming potential, fossil  
**GWP,b** Global warming potential, biogenic  
**GWP,luluc** Global warming potential, land use & land use change  
**GWP,ghg** Global warming potential, excluding biogenic uptake, emission and storage

**ODP** Ozone depletion potential  
**AP** Acidification potential  
**EP,f** Eutrophication potential, freshwater  
**EP,m** Eutrophication potential, marine  
**EP,t** Eutrophication potential, terrestrial  
**POCP** Photochemical ozone creation potential  
**ADPE** Abiotic depletion potential minerals

& metals\*  
**ADPF** Abiotic depletion potential fossil fuels\*  
**WDP** Water use deprivation potential\*  
 \*: The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator

# Environmental performance

## Resource use per declared unit

	UNITÀ	UPSTREAM		CORE PROCESS		A1:A3	DOWNSTREAM				
		A1	A2	A3	A4		C1	C2	C3	C4	D
<b>PERE</b>	MJ	1,81E+03	6,70E+00	1,10E+02	1,93E+03	4,63E+00	1,35E+00	6,28E-01	4,34E+00	1,55E-02	1,04E+02
<b>PERM</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>PERT</b>	MJ	1,81E+03	6,70E+00	1,10E+02	1,93E+03	4,63E+00	1,35E+00	6,28E-01	4,34E+00	1,55E-02	1,04E+02
<b>PENRE</b>	MJ	5,99E+03	2,38E+02	8,30E+02	7,06E+03	5,61E+02	7,00E+02	2,42E+02	4,01E+01	3,57E+00	1,85E+03
<b>PENRM</b>	MJ	0,00E+00	0,00E+00	1,66E+02	1,66E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>PENRT</b>	MJ	5,99E+03	2,38E+02	9,96E+02	7,23E+03	5,61E+02	7,00E+02	2,42E+02	4,01E+01	3,57E+00	1,85E+03
<b>SM</b>	kg	1,11E+03	0,00E+00	0,00E+00	1,11E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>RSF</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>NRSF</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>FW</b>	m <sup>3</sup>	3,97E+00	3,30E-02	2,54E+00	6,55E+00	3,55E-02	3,44E-02	1,00E-02	1,76E-02	1,82E-04	3,52E-01

Additional environmental impact indicators are computed in the LCA report but not reported in the EPD.  
 \*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

**PERE** Use of renewable primary energy excluding renewable primary energy resources used as raw materials  
**PERM** Use of renewable primary energy resources used as raw materials  
**PERT** Total use of renewable primary energy resources  
**PENRE** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials  
**PENRM** Use of non-renewable primary energy resources used as raw materials

**PENRT** Total use of non-renewable primary energy resources  
**SM** Use of secondary raw materials  
**RSF** Use of renewable secondary fuels  
**NRSF** Use of non-renewable secondary fuels  
**FW** Use of net fresh water

# Environmental performance

## Output flows and waste categories per declared unit

	UNITÀ	UPSTREAM			A1:A3	DOWNSTREAM					
		A1	A2	A3		A4	C1	C2	C3	C4	D
<b>HWD</b>	kg	5,58E-01	0,00E+00	1,29E+00	1,85E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>NHWD</b>	kg	2,39E+01	0,00E+00	1,84E+01	4,23E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,00E+02	0,00E+00
<b>RWD</b>	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>CRU</b>	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>MFR</b>	kg	5,28E+01	0,00E+00	1,39E+02	1,92E+02	0,00E+00	0,00E+00	0,00E+00	9,00E+02	0,00E+00	0,00E+00
<b>MER</b>	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>EE</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

**HWD** Hazardous waste disposed  
**NHWD** Non-hazardous waste disposed

**RWD** Radioactive waste disposed  
**CRU** Components for re-use  
**MFR** Materials for recycling

**MER** Materials for energy recovery  
**EE** Exported energy

# Calculation rules

The environmental burden of the product has been calculated according to EN 15804:2012+A2:2019 and PCR 2019:14 v 1.3.4.

This declaration is a cradle to gate with options EPD type, based on the application of Life Cycle Assessment (LCA) methodology to the whole life-cycle system. In the whole LCA model, infrastructures and production equipments are not taken into account.

**Hot rolled drawn wire at plant level** were described by using specific data from manufacturing facility (Lonato del Garda, BS, Italy) for year 2023.


Customized LCA questionnaires were used to gather in-depth information about all aspects of the production system (for example, raw materials contents and specifications, pre treatments, process efficiencies, air and water emissions, waste management), in order to provide a complete picture of the environmental burden of the system from raw materials supply (A1) to Transport (A2) and Manufacturing (A3). The use phase was not considered according to EN:15804 and PCR 2019:14 v 1.3.4, while transport to final destination (A4) and end of life (C1-C2-C3-C4-D) were considered. Therefore, in nominal installation and operating conditions, no emissions to air nor to water shall occur.

The total amount of billets treated in the rolling phase are partially purchased from other group steel shops.

According to ISO 14040 and 14044, allocation is avoided whenever possible by dividing the system into sub-systems. When allocation cannot be avoided physical properties are used to drive flow analysis. Due to the presence of co-products in steel mill, an economic allocation were used in that phase.



Scrap pre and post consumer has been modeled following new PCR 2019:14 v1.3.4 rules by adding environmental loads on pre-consumer.

**Data quality** has been assessed and validated during data collection process. According to EN:15804 the applied cut-off criterion for mass and energy flows is 1%.

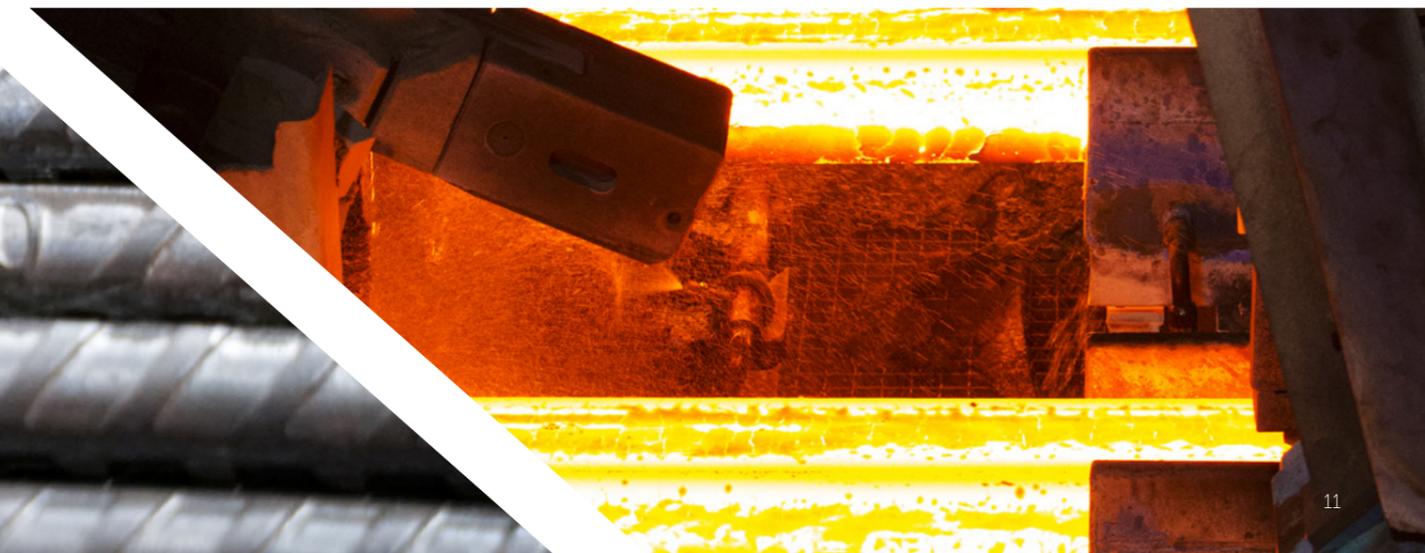

# Scenarios and additional technical information

# Upstream process

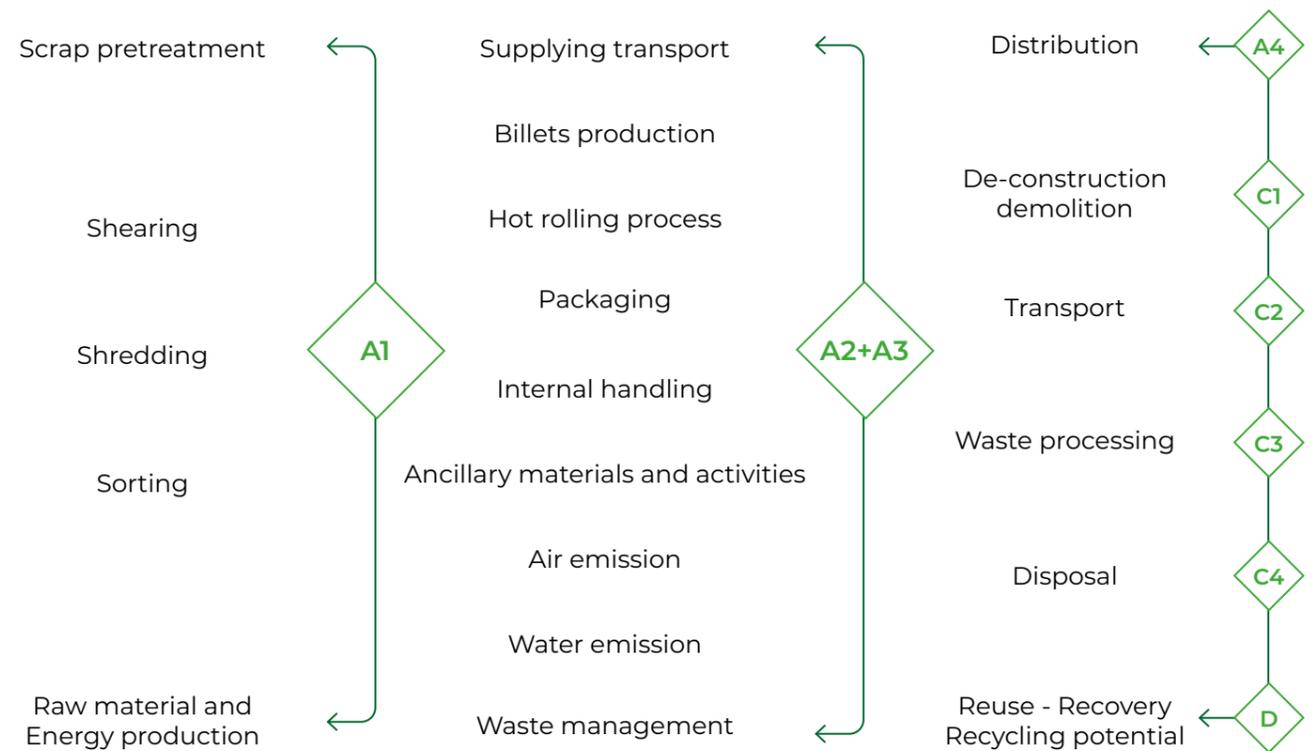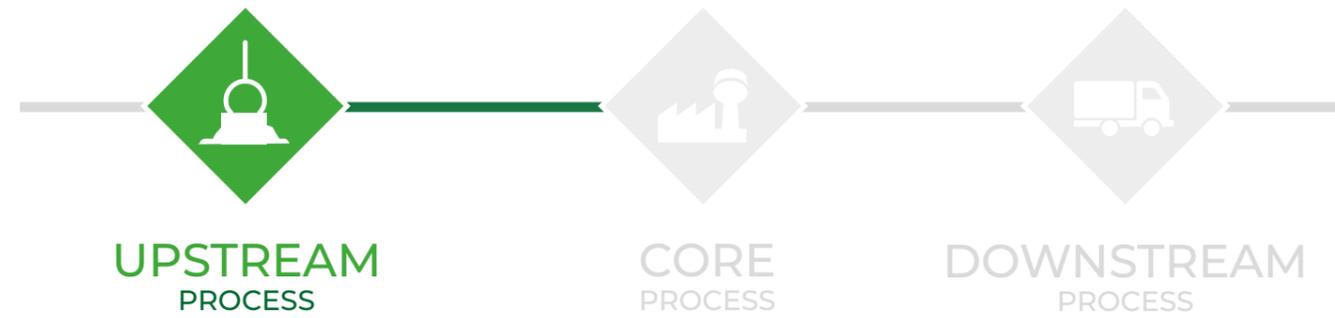


### Raw material supply

- Steel scrap collection (shredded both in external and internal plants) and other raw materials production
- Production of alloy elements
- Generation of electricity and other fuels from primary and from secondary energy resources (excluding waste treatments)
- Specific secondary materials pre-treatments, where appropriate



Broad scheme of hot rolled steel production, in which the main activities included in the system boundaries are listed and divided in the three subsystems: **UPSTREAM Process**, **CORE Module** and **DOWNSTREAM Process**.



## Core process

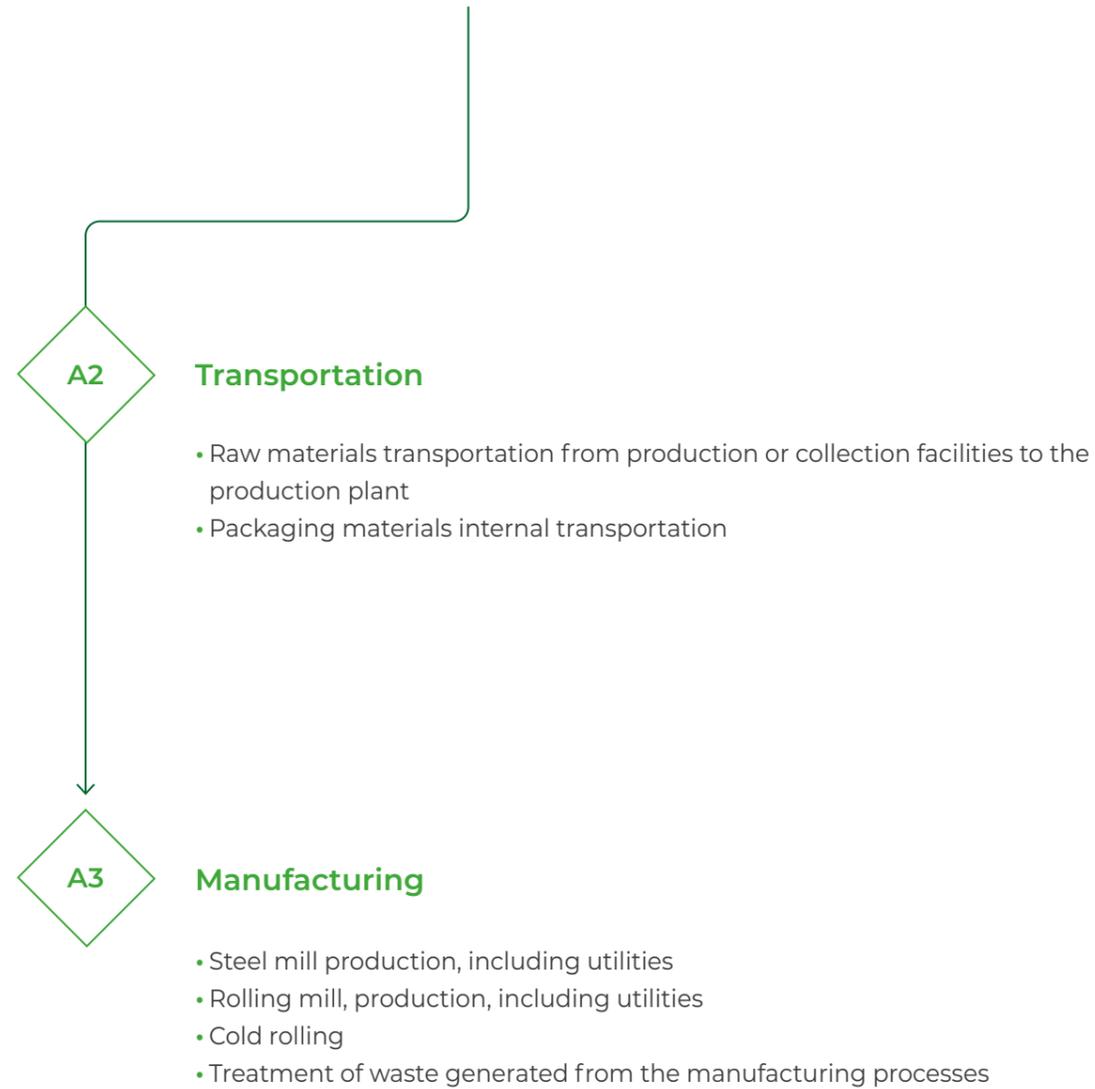

## Downstream process

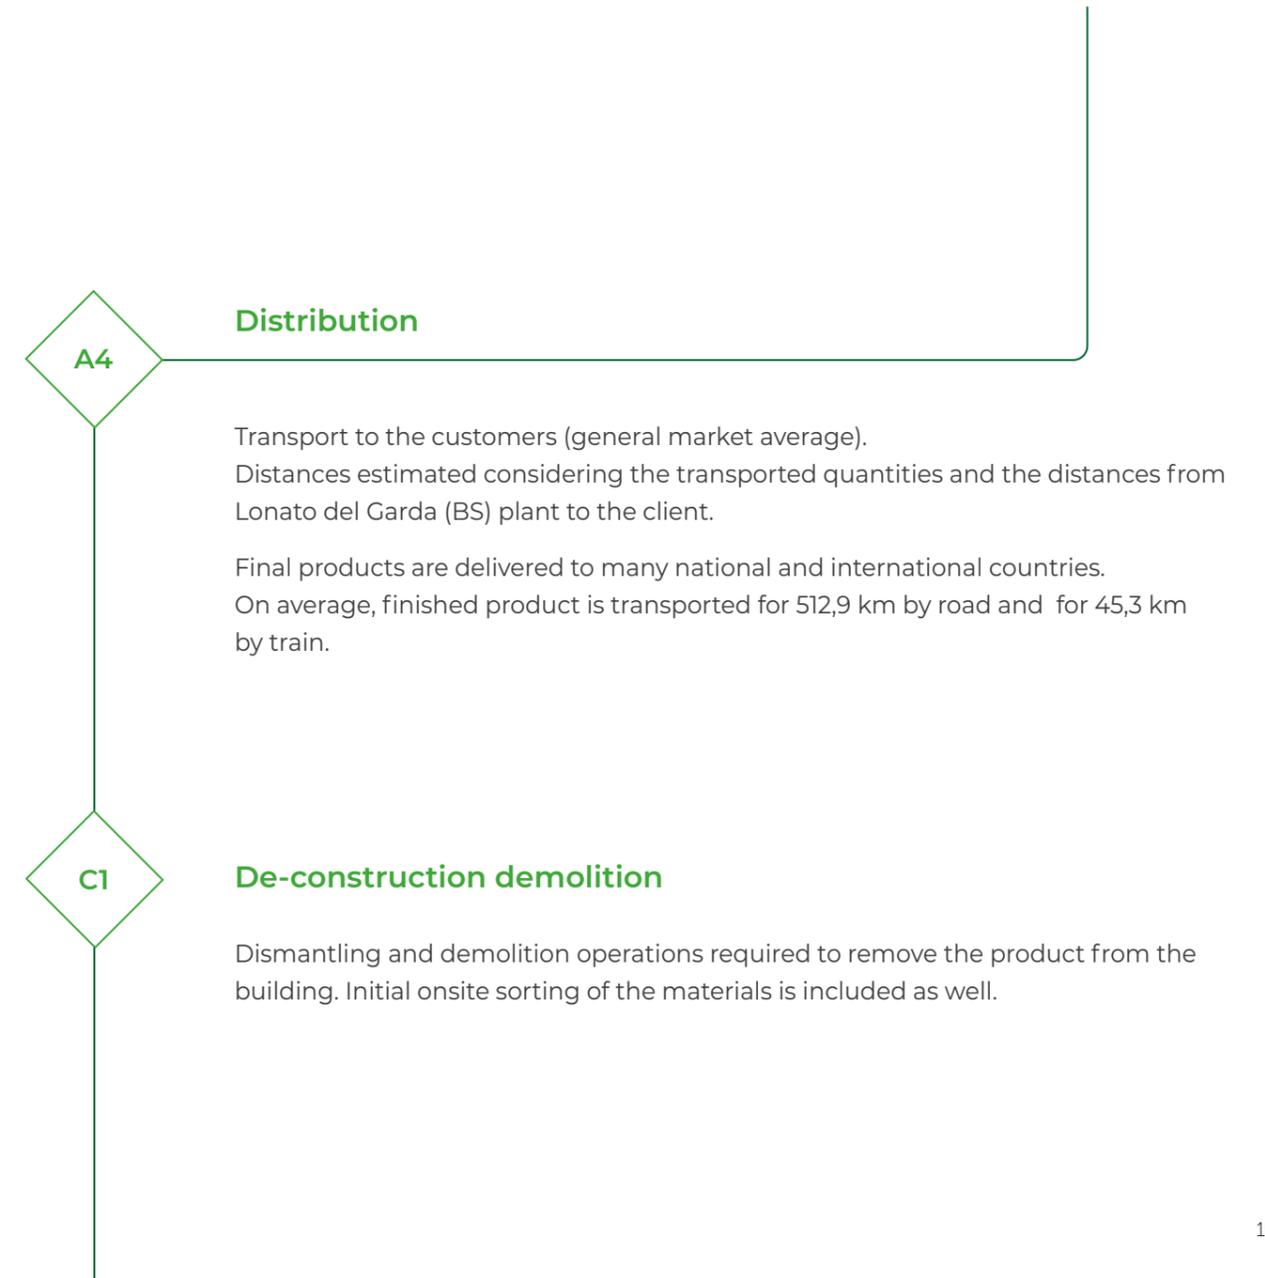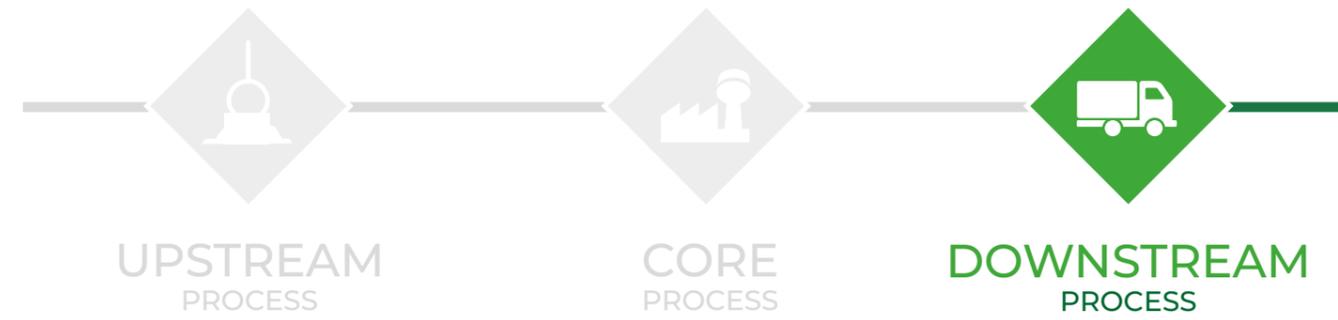

# Downstream process



# Other optional additional environmental information

**Feralpi plant in Lonato del Garda (BS)** is equipped with prevention and reduction systems for air emissions, a recirculating loop cooling to minimize water consumption and a waste management plan to prevent and reduce waste generation.

In accordance with general EPD® requirements the LCA study used specific, generic and proxy data. These last data are contributing to the environmental indicators less than 10%.

OTHER ENVIRONMENTAL INDICATORS		UNIT	UP	CORE	DOWN	TOTAL
AIR EMISSIONS	Dust from electric-arc furnace	[g]	-	2,35	-	<b>2,35</b>
	CO <sub>2</sub> from electric-arc furnace	[kg]	-	30,69	-	<b>30,69</b>
	NOx from hot rolling process	[g]	-	70,97	-	<b>70,97</b>
	SOx from hot rolling process	[g]	-	17,84	-	<b>17,84</b>
WATER EMISSIONS	Total Suspended Solids	[g]	-	5,53	-	<b>5,53</b>

MINIMUM CONTENT OF RECYCLED, RECOVERED, BY-PRODUCT MATERIALS								
PRODUCT TYPE	PRODUCT NAME	RECYCLED MATERIAL			RECOVERED MATERIAL	BY-PRODUCT MATERIAL		TOTAL CONTENT OF RECYCLED, RECOVERED, BY-PRODUCT MATERIAL
		Total	Pre-consumer	Pre-consumer		Internal	External	
		[%]	[%]	[%]	[%]	[%]	[%]	[%]
COLD-ROLLED STEEL	Weldable ribbed drawn wire	97,8	n.p.d.	n.p.d.	0	1,0	0	<b>98,8</b>

\*n.p.d : no performance determined

Recycled content verified according to ICMQ CP DOC 262, certification n. P568 rev. 2 and calculated according to UNI EN ISO 14021, publication date 28/02/2024, referred to 2023 year.

# References

- EN 15804:2012+A2:2019
- ISO 14040
- ISO 14044
- UNI EN ISO 14021:2021
- Life Cycle Assessment (LCA) applied to steel mill products and derivatives for EPD® purposes - final report
- General Programme Instructions, v4
- PCR 2019:14 - Construction products - v 1.3.4



